




**5 Year**  
Warranty

# VMD1B-C Series

SPDT DIN Socket Relays 12VDC/24VDC/24VAC/120VAC

The Veris VMD1B-C Series are SPDT blade style relays for socket/DIN mounting. The DIN rail compatible VBD1B-F sockets feature finger-safe terminals.

## DIMENSIONS

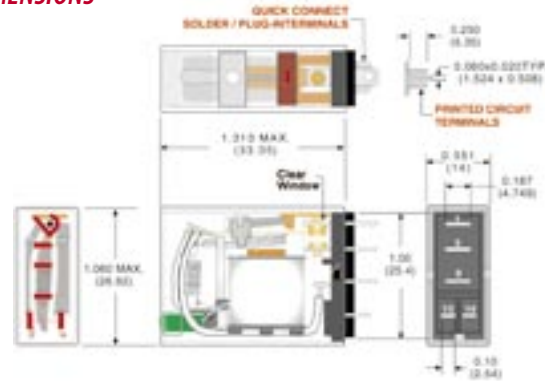


## WIRING DIAGRAM

Function	NEMA (IEC)* Terminal
Coil (+)**	14 (A1)
Coil (-)**	13 (A2)
COMM	9 (11)
N.O.	5 (14)
N.C.	1 (12)


\*Sockets support both numbering systems by labeling each terminal with two numbers.

\*\*Observe polarity for relays with DC coil voltages only

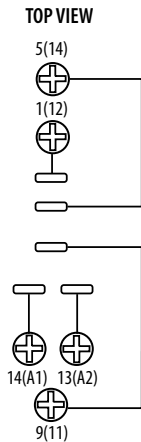


TYPICAL COIL PERFORMANCE	
Coil Power:	0.9 to 1.1 watts DC, 1.0 to 1.2VA (60Hz) AC@25°C

CONTACT RATINGS		
Voltage	Amperage (r)	Motor Load 50/60Hz.
28VDC	100mA -12A	-
110/120VAC	100mA -15A	1/2HP
220/277	100mA -12A	1HP

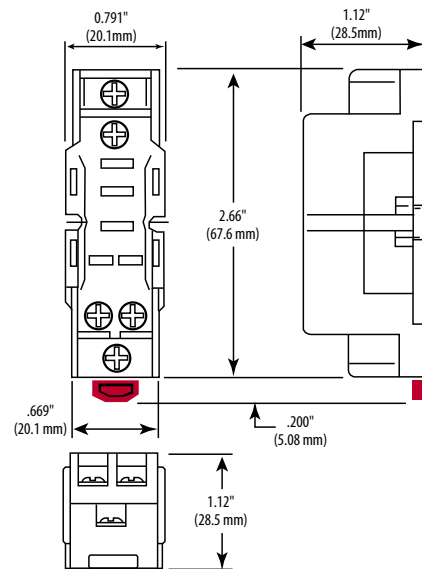

## ORDERING INFORMATION

(Coil)  
**VMD1B-C**  Example: VMD1B-C24A = SPDT 15A Relay with 24VAC coil  
 12D = 12VDC  
 24D = 24VDC  
 24A = 24VAC  
 120A = 120VAC

## SPDT SOCKET ORDERING INFORMATION

MODEL	FINGER SAFE	HOLD DOWN CLIP
VBD1B-C		
VBD1B-F		



These relays are UL Listed, when used with the Veris sockets.