



**5 Year**  
Warranty

# VMD2B-C Series


DPDT DIN Socket Relays  
12VDC/24VDC/24VAC/120VAC

The Veris VMD2B-C Series are DPDT blade style relays for socket/DIN mounting. Both the full featured and standard VBD2B-C DIN rail sockets are compatible with the VMD2B-C relays.

### WIRING DIAGRAM

Function	Terminal
Coil (+)*	8
Coil (-)*	7
COMM1	5
N.O.1	3
N.C.1	1
COMM2	6
N.O.2	4
N.C.2	2


\*Observe polarity for relays with DC coil voltages only

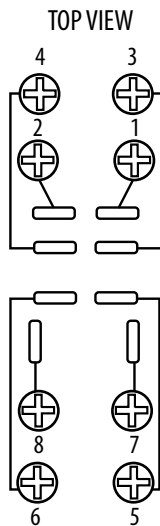


TYPICAL COIL PERFORMANCE	
Coil Power:	0.9 to 1.1 watts DC, 1.0 to 1.2VA (60Hz) AC@25°C

CONTACT RATINGS		
Voltage	Amperage (r)	Motor Load 50/60Hz.
28VDC	100mA -12A	-
110/120VAC	100mA -15A	1/2HP
220/277	100mA -12A	1HP

### DIMENSIONS

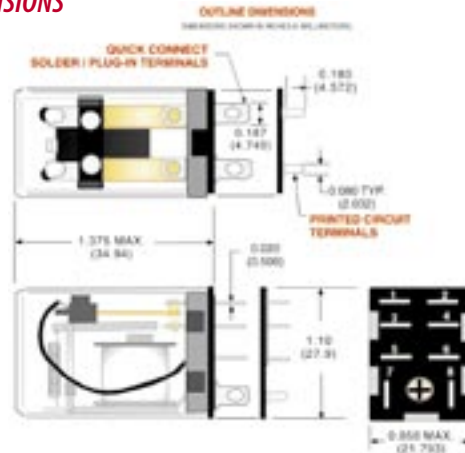


### VBD2B-C Socket

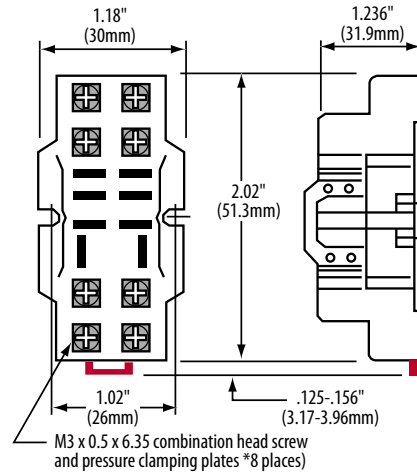

NOTE: VBD2B-F full featured sockets are also compatible

### ORDERING INFORMATION



Example: VMD2B-C24A = DPDT 10A Relay with 24VAC coil

### SPDT SOCKET ORDERING INFORMATION

MODEL	FINGER SAFE	HOLD DOWN CLIP
VBD2B-C		
VBD2B-F		



These relays are UL Listed, when used with the Veris sockets.