




**5 Year**  
Warranty

# VMD4B-CL Series

4PDT DIN Socket Relays 24VDC/24VAC/120VAC




The Veris VMD4B-CL Series are 4PDT blade style with coil status LEDs relays for socket/DIN mounting. Both the full featured and standard DIN rail sockets are compatible with the VMD4B-C relays.

### DIMENSIONS

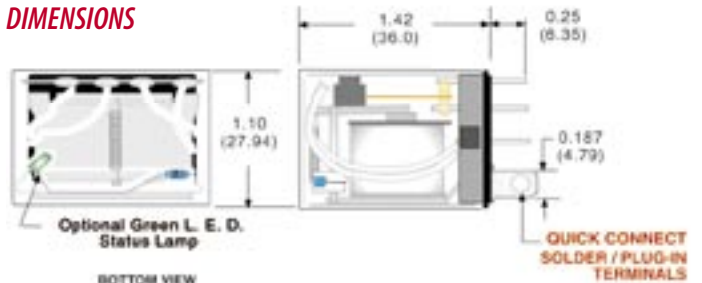

### WIRING DIAGRAM

Function	Terminal
Coil (+)*	14
Coil (-)*	13
COMM1	9
N.O.1	5
N.C.1	1
COMM2	10
N.O.2	6
N.C.2	2
COMM3	11
N.O.3	7
N.C.3	3
COMM4	12
N.O.4	8
N.C.4	4




\*Observe polarity for relays with DC coil voltages only

TYPICAL COIL PERFORMANCE	
Coil Power:	1.5 watts DC, 2.5VA (60Hz) AC@25C

CONTACT RATINGS	
Voltage	Amperage (r)
28VDC	100mA -10A
110/120VAC	100mA -10A
220/277	100mA -10A

### VBD4B-F Socket

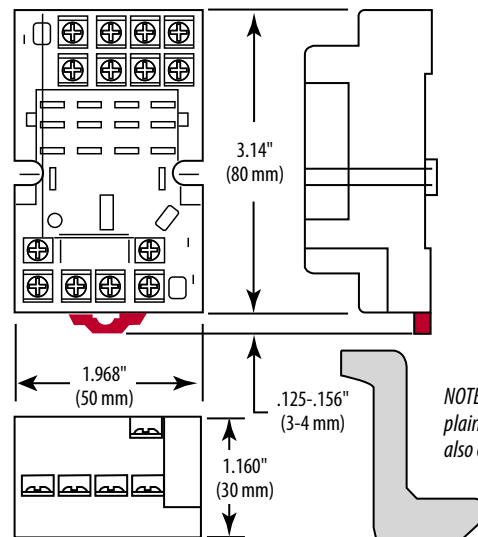

Hold Down Clip included with F Model socket

NOTE: VBD4B-C plain sockets are also compatible

### ORDERING INFORMATION

VMD4B-CL	(Coil)
	24D = 24VAD
	24A = 24VAC
	120A = 120VAC

Example: VMD4B-CL24A = 4PDT 10A Relay with 24VAC coil

### 4PDT SOCKET ORDERING INFORMATION

MODEL	FINGER SAFE	HOLD DOWN CLIP
VBD4B-C		
VBD4B-F	●	●

These relays are UL Listed, when used with the Veris sockets.



E198453



LR 35144